


CB

Product Features

- Medical & ITE safety meet
- 2 MOPP input to output isolation
- DOE Efficiency Level VI&COC V5 Tier2
- Leakage current < 100µA
- ≤ 0.075W standby power
- Up to 5,000m operating altitude

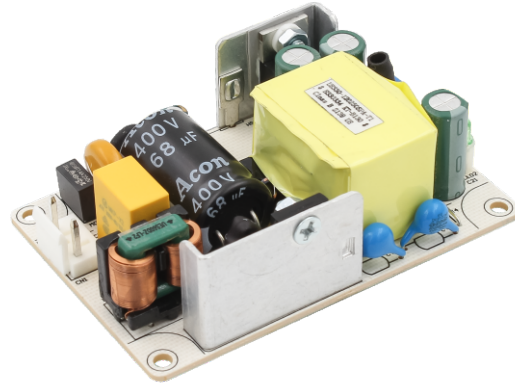

Models & Ratings

Model Number	Voltage ^(*)	Current	Rated Power	Ripple & Noise (max) ^(**)	Voltage Tolerance	Line & Load Regulation	Efficiency	Start Up Delay
UES30-XXXYYYSPA-OP	5.0	0.01-6.0	30W	120mVpk-pk	±5%	Line: ±1% Load: ±5%	86.0%	≤3s
	5.1-6.0	0.01-5.88	30W	120mVpk-pk	±5%		86.0%	≤3s
	6.1-7.5	0.01-4.92	30W	120mVpk-pk	±5%		87.7%	≤3s
	7.6-8.0	0.01-3.95	30W	120mVpk-pk	±5%		87.7%	≤3s
	8.1-9.0	0.01-3.70	30W	120mVpk-pk	±5%		87.7%	≤3s
	9.1-10.0	0.01-3.30	30W	120mVpk-pk	±5%		87.7%	≤3s
	10.1-11.0	0.01-2.97	30W	120mVpk-pk	±5%		87.7%	≤3s
	11.1-12.0	0.01-2.70	30W	120mVpk-pk	±5%		87.7%	≤3s
	12.1-13.0	0.01-2.48	30W	120mVpk-pk	±5%		87.7%	≤3s
	13.1-14.0	0.01-2.29	30W	120mVpk-pk	±5%		87.7%	≤3s
	14.1-15.0	0.01-2.13	30W	120mVpk-pk	±5%		87.7%	≤3s
	15.1-16.0	0.01-1.99	30W	200mVpk-pk	±5%		87.7%	≤3s
	16.1-17.0	0.01-1.86	30W	200mVpk-pk	±5%		87.7%	≤3s
	17.1-18.0	0.01-1.75	30W	200mVpk-pk	±5%		87.7%	≤3s
	18.1-19.0	0.01-1.66	30W	200mVpk-pk	±5%		87.7%	≤3s
	19.1-20.0	0.01-1.57	30W	200mVpk-pk	±5%		87.7%	≤3s
	20.1-21.0	0.01-1.49	30W	200mVpk-pk	±5%		87.7%	≤3s
	21.1-22.0	0.01-1.42	30W	200mVpk-pk	±5%		87.7%	≤3s
	22.1-23.0	0.01-1.36	30W	200mVpk-pk	±5%		87.7%	≤3s
	23.1-24.0	0.01-1.30	30W	200mVpk-pk	±5%		87.7%	≤3s
	24.1-27.0	0.01-1.24	30W	200mVpk-pk	±5%		87.7%	≤3s
	27.1-30.0	0.01-1.11	30W	300mVpk-pk	±5%		87.7%	≤3s
	30.1-33.0	0.01-1.00	30W	300mVpk-pk	±5%		87.7%	≤3s
	33.1-36.0	0.01-0.91	30W	300mVpk-pk	±5%		87.7%	≤3s
36.1-39.0	0.01-0.83	30W	300mVpk-pk	±5%	87.7%	≤3s		
39.1-42.0	0.01-0.77	30W	300mVpk-pk	±5%	87.7%	≤3s		
42.1-45.0	0.01-0.71	30W	300mVpk-pk	±5%	87.7%	≤3s		
45.1-48.0	0.01-0.67	30W	300mVpk-pk	±5%	87.7%	≤3s		

Mechanical Details

AC Input Connector :

Pin No.	1	2	3
Assignment	AC/N	No Pin	AC/L

DC Output Connector :

Pin No.	1	2
Assignment	V+	V+

Unit: mm

Notes

(*1) Other options are available, please contact our sales representative for details.

(*2) Measured at output connector with 20MHz bandwidth and 0.1µF ceramic in parallel with 10µF electrolytic capacitors.

Input

Input Voltage Range	90-264VAC
Frequency Range	47-63Hz
Input Current	1.0A at 115VAC
Inrush Current	100A max at 240VAC cold start
Touch Leakage Current ^(max)	< 100µA at 264VAC

Environmental

Operating Temperature	-10°C to 50°C
Storage Temperature	-20°C to 70°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	76.2(L)x50.8(W)x27.5(H)mm
Weight	85g
MTBF	>100,000hrs MIL-HK8K-217 at 25°C
Isolation	5,656VDC Input to Output

Protection

Overload	115-170% rated output power, auto recovery
Over Voltage	110-150% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Approvals

Safety Agency / Mark	Medical(Meet)	ITE(Meet)
CB	IEC60601-1	IEC62368-1
NRTL	ANSI/AAMI ES60601-1 CAN/CSA-C22.2 NO. 60601-1	-
TUV-Mark	EN60601-1	EN62368-1

EMC

Emissions	Medical	ITE
Conducted	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Radiated	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN 60601-1-2	EN55035, CISPR 35
ESD	EN61000-4-2	±15kV air, ±8kV contact
Radiated Immunity	EN61000-4-3	10V/m, 3V/m 80MHz - 2.7GMHz
EFT/Burst	EN61000-4-4	±2kV on AC port, ±1kV on signal ports
Surge	EN61000-4-5	±1KV line to line (diff mode)
Conducted Immunity	EN61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	EN61000-4-8	30 A/m
Dips & Interruptions	EN61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	10M Ohms, 500VDC input to output